




A R C H I T E C T S

U T A H

**ADDENDUM #3
THE QUAD – CEU SAN JUAN
DFCM # 03264620
3/2/04**

The information contained herein, including additions or modifications made to the Bid Documents by this Addendum, is to be incorporated in the Contract Documents as if originally contained therein. Bidders shall acknowledge the receipt of Addenda on their Bid Form.

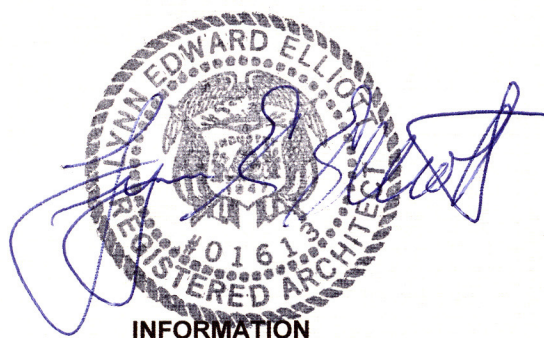

INFORMATION

- ITEM I.3.1 With Alternative #1:
The Mechanical ductwork is exposed, just as it will be under Base Bid. The Electrical fixtures become surface mounted instead of recessed, and the wiring is routed into the top of the panels.

CLARIFICATIONS

- ITEM C.3.1 With the deletion of several previous Alternatives called out on the drawings, the north wall of the new building will be built as shown on the drawings, including the demolition and reconstruction of the wall extending across the north end of the existing cafeteria.
- ITEM C.3.2 Either 6x 6 mesh or fiber-mesh is acceptable for slab reinforcement. However, we prefer the mesh, to alleviate finishing problems with the fiber. Also, we do not want a vapor barrier under the slab – also to facilitate better finishing conditions.
- ITEM C.3.3 The walls around the toilet room are 9'-6 tall (with a 2x 6 lid). The curving wall at the Study area is 7'-0 high. The other walls (at vestibule and at future kitchen area) go to the underside of the roof.
- ITEM C.3.4 No additional finish will be necessary on the top of the existing brickwork which will be exposed by the removal of the existing soffits.

DRAWINGS

- ITEM D.3.1 Drawing A701.
Add the following Section 09790: "Vinyl Composition Tile, shall be Azrock, 1/8 " or approved equal."
- ITEM D.3.2 Drawing A102.
Change the footing steel note to read "#3 Cross Bars at 18" ok."